

DocuPrint CM415 AP / M465 AP
A4 Colour and Monochrome
Multifunction Printers



DocuPrint CM415 AP / M465 AP

Think bigger. Go smaller



Big performance doesn't have to come with big dimensions.

Fuji Xerox makes you rethink size with the DocuPrint CM415 AP / M465 AP. Compact yet fast and flexible, these two smart machines are set to bring productivity in your office to a new high!

Compact Performers

Highly functional multifunction device

The DocuPrint CM415 AP / M465 AP are a compact print solution, delivering fast print speeds and exceptional colour and monochrome print quality, supporting copying, faxing and scanning and email.

Mobile and cloud connectivity

The DocuPrint CM415 AP / M465 AP offer support for mobile devices, allowing easy access to the device whether you are in or out of the office.

DocuPrint CM415 AP

Copy Print Monochrome: 35 ppm
Colour: 35 ppm

Scan Monochrome: 40 ppm
Colour: 20 ppm

DocuPrint M465 AP

Copy Print Monochrome: 45 ppm

Scan Monochrome: 40 ppm
Colour: 20 ppm



Productivity and Efficiency

Advanced document security


The built-in Authentication feature available on the DocuPrint CM415 AP / M465 AP adds secure document printing for up to 1,000 users. Documents can be sent to the device, where they are held in its hard drive until you release the job by entering a password or pin code. For even greater efficiency, you can 'tap-and-go' to release the print job with a security swipe card by adding a built-in IC Card Reader^ to the device.



IC Card authentication can also provide access control to specific functions on the device, enhancing both security management and user convenience.

This is critical in environments where multiple users have access to the same device, and where confidential documents could fall into the wrong hands.

^ Requires IC Card Reader Kit option

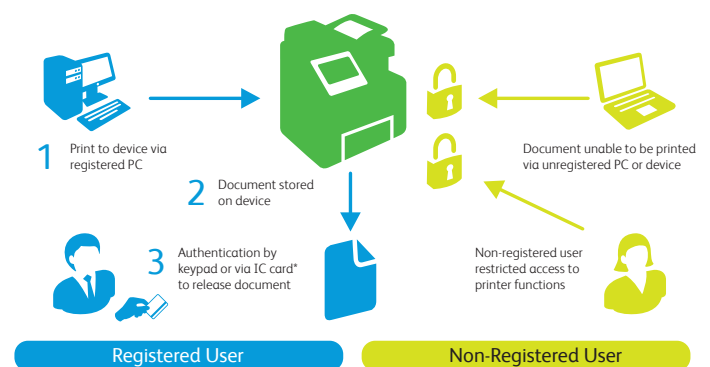

Take control of your print environment

The DocuPrint CM415 AP / M465 AP feature advanced reporting that can track and report every page that is printed on the device – by user, workgroup or department. By adding the optional Image Log Kit, you'll be able to automatically store every image that's ever been printed, scanned, copied or faxed to a third party server or folder. It's the ultimate safeguard if you require an audit trail for legal or security reasons.

Print limits can be assigned per user or group, including copies and scans. This not only gives you complete control over your print costs, but also gives you total visibility of your print environment.



Intuitive 7-inch touch panel with Flick/Drag operation

The DocuPrint CM415 AP / M465 AP are equipped with an easy-to-use, 7-inch touch screen that supports flick/drag operations, allowing for intuitive, easy operation. The menu is customisable, allowing the user to tailor menu items to common work functions, increasing productivity.

Powerful Document Handling via DocuWorks*

DocuWorks is a document handling software that integrates with the DocuPrint CM415 AP / M465 AP. It allows you to manage and share information by seamlessly handling, searching and editing electronic documents created with various applications (Microsoft Office, PDF, etc) and paper documents imported from scanners.

Furthermore, when integrated with Working Folder* – Fuji Xerox’s cloud service, you can securely access your information on the go through an internet enabled device.

* Optional

Create Searchable PDF Documents

With the optional Searchable PDF Kit you can convert paper based documents into searchable PDF documents.

Perfect for archiving, your documents can be stored electronically, saving on bulky storage space and time consuming document handling. And as the documents are now ‘searchable’, retrieval of information is quick and easy.

Automate complex processes with a touch of a button

The manual processing of paperwork in business is costly in terms of time and resources. The DocuPrint CM415 AP / M465 AP can automate these manual processes by customising the control panel to your specific requirement.

If you regularly scan and email documents to certain people or workgroups, you can set up a specific icon on the control panel to do this automatically. For example, if you want to scan a document and save it to a network folder, and at the same time email it to a certain address, plus make 3 copies of it, then this can be automated through a press of a single button. If you want to turn a complex document into a searchable pdf, store it in a network directory for retrieval, and compress the large file before emailing, then this too can be achieved via a one-touch operation.

By eliminating manual processes many organisations, large and small, can achieve increased staff productivity, minimised risk of errors, improved office communication, and reduced overall cost of document-handling.

Eco-friendly

EA-Eco toner reduces power consumption

Our EA-Eco Toner with low-melt technology achieves minimum fusing temperature at 20°C less than conventional toner for significant energy savings.

Excellent TEC Value

The DocuPrint CM415 AP / M465 AP conform to the International Energy Star Program standards for reducing power consumption.

1.8 kWh
2.0 kWh

CM415 AP M465 AP

Remote Power off

Devices located at a distance may be switched off remotely via PC. In large facilities such as a campus or factory building, this feature can reduce the time and labour required to manage remote devices.

Other convenient features

- ① **Duplex Auto Document Feeder** Copying and scanning is fast and efficient thanks to the Duplex Automatic Document Feeder
- ② 7-inch Colour Touch Screen Interface
- ③ 150 sheet Multipurpose tray
- ④ 550 sheet input tray
- ⑤ One tray module* 550 sheet tray
(Extra two tray module available only on the DocuPrint M465 AP)
- ⑥ Cabinet*

* Optional



DocuPrint CM415 AP full configuration

Specifications DocuPrint CM415 AP / M465 AP

Basic Specifications / Copy Function

	DocuPrint M465 AP	DocuPrint CM415 AP
Item	Description	
Type	Desktop	
Memory Capacity	4 GB (Max.4 GB)	
Hard Disk Capacity ¹⁾	160 GB or larger (Used space: 128 GB)	
Colour Capability	Monochrome	Full colour
Copy Resolution	600 × 400 dpi	
Printing Resolution	1200 × 2400 dpi (Photo ²⁾ , 600 × 600 dpi (Text/Text-Photo/Photo/Map)	600 × 600, 1200 × 1200
Warm-up Time	35 seconds or less (At room temperature 23°C). 18 seconds or less if the main power is on (At room temperature 23°C).	35 seconds or less (At room temperature 23°C). 20 seconds or less if the main power is on (At room temperature 23°C).
Original Size	Maximum of Legal for both Sheet and Book	
Paper Size	Max.	A4, Legal ³⁾ [Legal when using Bypass Tray]
	Min.	A5 [Postcard(100 × 148), 3 × 5" (76 × 127 mm), when using Bypass Tray]
Paper Weight ⁴⁾	Image Loss Width	Lead Edge 4.0 mm, trail Edge 4.0 mm, Right & Left Edges 4.0mm
	Paper Tray	60 to 216 gsm
First Copy Output Time	Bypass Tray	60 to 216 gsm
	Monochrome: 5.0 seconds	Monochrome: 8.6 seconds (A4 / Monochrome priority mode) Colour: 10.0 seconds (A4 / Colour priority mode)
Reduce / Enlarge	Some Magnification	1:1 +/- 2%
	Reduce/Enlarge Presets	50%, 70%, 81%, 86%, 115%, 122%, 141%, 200%
Continuous Copy Speed ⁵⁾	Custom Reduction/Enlargement Ratios	25 to 400% (in 1% increments)
	Monochrome: 45 ppm	Monochrome: 35 ppm, Colour: 35 ppm
Paper Tray Capacity ⁶⁾	Standard	550 sheets × 1 tray + Bypass Tray 150 sheets
	Optional	Sheet Feeder: 550 sheets
	Max.	2350 sheets (Standard + Sheet Feeder × 3 tray)
Continuous Copy ⁷⁾	999 sheets	
Output Tray Capacity ⁶⁾	250 sheets	
Power Supply	AC220-240 V ± 10%, 6 A, 50 / 60 Hz	AC220-240 V ± 10%, 5 A, 50 / 60 Hz
Power Consumption (AC230V +/- 10%)	1.09 kW or less	1.13 kW or less
	Sleep Mode: 1.25 W or less Low Power Mode: 18.43 W or less ⁸⁾ Ready Mode: 81.18 W or less	Sleep Mode: 1.18 W or less Low Power Mode: 22.31 W or less ⁸⁾ Ready Mode: 82.60 W or less
Dimensions	W 560 × D 541 × H 577 mm	W 538 × D 553 × H 625 mm
Weight ⁵⁾	26 kg	37 kg

*1: Not all of the hard disk capacity is actually available for users. *2: When Image Enhancement processing is performed. *3: The tray should be extended when legal size paper is placed on it. *4: Use Fuji Xerox recommended paper. Documents may not be printed correctly depending on usage conditions. *5: The speed may be reduced due to the image quality adjustment. *6: 80 gsm paper. *7: Copy process may stop temporarily for optimisation of image quality. *8: Low Power Mode is not set at the time of shipment from the factory. *9: Including Toner Cartridge.

Print Function

Item	Description	
Page Description Language	Standard: PCL5 / PCL6 Optional: Adobe [®] PostScript [®] 3	
Operating System ²⁾	PCL 6 (Standard)	Windows Server [®] 2003 (32bit), Windows Vista [®] (32bit), Windows Server [®] 2008 (32bit), Windows [®] 7 (32bit), Windows [®] 8 (32bit), Windows [®] 8.1 (32bit), Windows Server [®] 2003 (64bit), Windows Vista [®] (64bit), Windows Server [®] 2008 (64bit), Windows Server [®] 2008 R2 (64bit), Windows [®] 7 (64bit), Windows [®] 8 (64bit), Windows [®] 8.1 (64bit), Windows Server [®] 2012 (64bit), Windows Server [®] 2012 R2 (64bit)
	Adobe [®] PostScript [®] 3 [™] Driver (Optional)	Windows Server [®] 2003 (32bit), Windows Vista [®] (32bit), Windows Server [®] 2008 (32bit), Windows [®] 7 (32bit), Windows [®] 8 (32bit), Windows [®] 8.1 (32bit), Windows Server [®] 2003 (64bit), Windows Vista [®] (64bit), Windows Server [®] 2008 (64bit), Windows Server [®] 2008 R2 (64bit), Windows [®] 7 (64bit), Windows [®] 8 (64bit), Windows [®] 8.1 (64bit), Windows Server [®] 2012 (64bit), Windows Server [®] 2012 R2 (64bit)
Emulation	Mac OS X 10.5/10.6/10.7, OS X 10.8/10.9	
Interface	Standard	ESC / P-K (LQ1900K II), TIFF, PEG, PDF, HP-GL (HP7586B), HP-GL2 / RTL (HP Design Jet 750C Plus), DocuWorks, PCL5 / 6 (HP Color Laser Jet 5500), KSSM, K55843, K55895
	Optional	Ethernet 100BASE-TX / 10BASE-T, USB2.0

*1: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document. *2: For the latest information on the supported operating systems, please refer to our official website. Note: WSD stands for Web Services on Devices. Note: XPS stands for XML Paper Specification.

Notes
1) If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall Fuji Xerox be liable for any damages whatsoever arising from loss of data.
2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.
3) The product specifications, appearance and other details in this catalog are subject to change without notice for improvements.

Other company names or product names are registered trademarks or trademarks of each company.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law: Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

For more information or detailed product specification, please call or visit us at

Fuji Xerox Asia Pacific Pte Ltd

14a Rodborough Road Frenchs Forest NSW 2086

Australia 1300 793 769 New Zealand 0800 993 769

www.fujixeroxprinters.com.au www.fujixeroxprinters.co.nz

Scan Function

Item	Description
Type	Colour Scanner
Scan Resolution	600 × 600 dpi, 400 × 400 dpi, 300 × 300 dpi, 200 × 200 dpi
Scanning Speed ¹⁾	Duplex Automatic Monochrome: 40 ppm; Colour: 20 ppm [Fuji Xerox standard paper (A4), 200dpi, to Folder]

*1: The scanning speed varies depending on the documents.

Fax Function

Item	Description
Original Size	Max : A4, Legal
Recording Paper Size	Max: A4, Legal, Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds ¹⁾
Transmission Mode	ITU-T G3
Scanning Resolution	600 × 600 dpi, 400 × 400 dpi, 200 × 200 dpi, 200 × 100 dpi
Transmission Speed	G3 : 33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kbps
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Max. 1 port

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 × 3.85 lines/mm) and in high-speed mode (28.8kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.

Duplex Automatic Document Feeder

Item	Description
Original Size / Paper Weight	Max : A4, Legal; Min: A5 ¹⁾ 50 to 125 gsm (In Duplex: 60 to 125 gsm)
Capacity ²⁾	60 Sheets
Feeding Speed (A4 Simplex)	Monochrome: 40ppm Monochrome: 35ppm, Colour: 20ppm

*1: 139.7 × 139.7 mm for non-standard paper size. *2: 80gsm paper.

Accessories

Item	DocuPrint M465 AP	DocuPrint CM415 AP
550 Sheet Feeder	EC102823	EC102803
Cabinet	EC102786	EC102786
Stand Skateboard	EC102787	EC102787
Embedded IC Card Reader	EC102893	EC102893
Omnikey External Card Reader ¹⁾	800L06481	800L06481
Annotation Copy Kit	EC102840	EC102807
Network Accounting Kit	EC102904	EC102894
External Access Kit	EC102905	EC102895
USB Memory Kit	EC102843	EC102810
Gigabit Ethernet	EC102906	EC102896
Adobe PostScript 3 Kit	EC102907	EC102897
TC/SC Additional Font ROM Kit	EC102908	EC102898
Server Fax Kit	EC102909	EC102899
High Compression Image Kit	EC102848	EC102815
Searchable PDF/DW	EC102849	EC102816
Copy Management Expansion Kit	EC102910	EC102900
Image Log Kit	EC102911	EC102901
Image Log Kit (Adobe PostScript)	EC102912	EC102902

*1: Supports HID. Requires USB kit

Consumables

Item	Code	Code	Code
Toner Cartridge (K) ¹⁾	CT202373 (25k)	CT202372 (10k)	CT202352 (11k)
Toner Cartridge (Y) ¹⁾	—	—	CT202353 (11k)
Toner Cartridge (M) ¹⁾	—	—	CT202354 (11k)
Toner Cartridge (C) ¹⁾	—	—	CT202355 (11k)
Drum Cartridge ¹⁾	CT351069 (85k)	—	CT351066 (60k)
Fusing Unit 220V ¹⁾	—	—	EC102822 (30k)
Waste Toner Cartridge ¹⁾	—	—	EL500268 (100k)
Maintenance Kit ¹⁾	EC102854 (200k)	—	EL500267 (200k)
Feed Roll Kit ¹⁾	EC102856 (100k)	—	—

*1: Average standard pages. Declared Yield in accordance with ISO/IEC 19752. Yield will vary based on image, area coverage and media used.



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

